



GLOBAL SYN-TURF

GREENING PLANET EARTH

Product Specification Sheet



Pet Turf

USES


- ▶ Landscape
- ▶ Lawns
- ▶ Playgrounds
- ▶ Traffic Medians
- ▶ Pet Areas
- ▶ Commercial or Residential
- ▶ Light-Heavy Traffic



15 Year Manufacturer's Warranty
8 Year Manufacturer's High Traffic Warranty



Flo-Rite Drainage Technology

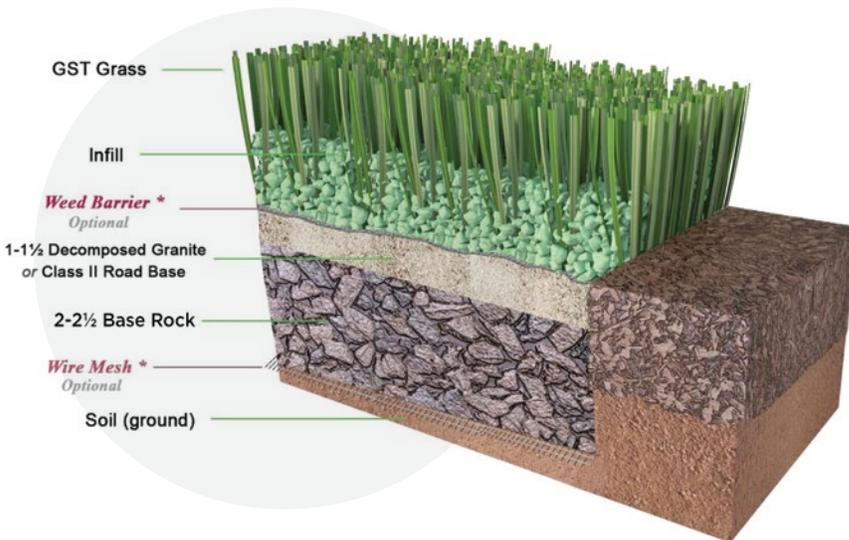

U-BLADE

SPECIFICATIONS

Pile Height:	1-1/8"
Turf Gauge:	3/8"
Face Weight:	50 oz./yd ²
Backing Weight:	26 oz./yd ²
Total Weight:	76 oz./yd ²
Stitch Rate:	16/10cm
Stitches/M ² :	16800
Material/Dtex:	PE11000 + PP3500
Color:	Emerald Green and Olive Green with Brown and Green Thatching
Type Of Fiber:	PE Monofilament and PP Curled As Thatch
Infill Amount:	1.0 lb./psf.
Primary Backing:	Premium GST Backing
Tuft Bind:	17+ lb/force (ASTM D1335)
Blade Type:	U-Blade
Permeability:	121.4 inches/hr. (ASTM F1551)
Melting Point:	176 °F (ASTM D2859)
Grab Tear MD:	>200 lb./force (ASTM D5034)
Grab Tear CMD:	>200 lb./force (ASTM D5034)
Roll Width:	15 ft
Roll Length:	100 ft
Sq. Ft. Per Roll:	1500
Total Roll Weight:	845 lbs

